



FIBERFLEX

Easy cable laying in residential installations

Pulling-in of power, telecommunication and antenna cables in empty and occupied conduit systems:

- Flexible and yet rigid glass fibre rod (diameter 3 mm)
- Low-friction cabling work
- Adapting even narrow bending radii
- Extensive accessories available for nearly every area of application
- Pulling force up to 500 N (50 kp)
- All parts are stored in a handy and impact-proof cassette




FIBERFLEX Cassette

Set includes:

- 1 Rod (25, 30 or 50 m long)
- 2 Cable grips (diam. 4-7 and 6-9 mm)
- 3 Spring ball leaders (diam. 7, 10 and 13 mm)
- 1 Pulling grip
- 3 Connector heads (diam. 6 mm)
- 3 Leaders with pulling eye
- 1 Bottle of special adhesive
- 1 Instructions for use

- **Order No. 54 552**
with insertion rod **25 m**
- **Order No. 72 358**
with insertion rod **30 m**
- **Order No. 72 359**
with insertion rod **50 m**

Dimensions (L x W x H): 370 x 260 x 70 mm
Weight: approx. 1.3 kg (with insertion rod 25 m)

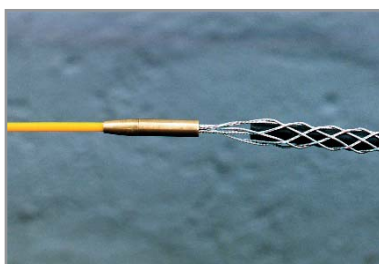

Flexible: the revolving threaded sleeve connects cable grip and rod.



Problem-free: the spring ball leader adjusts even to narrow bends.



Handy: accessories are stored in the cassette's center compartment